


GEYER SMART SOLUTIONS

Smart Two-Channel Wi-Fi Dimmer Module

GS-D2CH · 2 × 100 W · 18 mm

Independent brightness control with local push-buttons and remote operation through the GEYER Smart app.

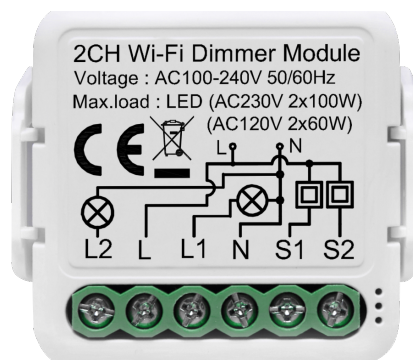

2 CHANNELS · Wi-Fi 2.4 GHz



REMOTE CONTROL

Individual or combined ON/OFF & dimming through the GEYER Smart app.



SCHEDULES & AUTOMATIONS

Up to 30 daily or weekly schedules, lighting scenes and weekly scheduling.



LOCAL CONTROL

Short press for ON/OFF and long press for dimming via push-buttons.



SHARING

Access for up to 20 users with push notifications.

KEY TECHNICAL DATA

Input voltage	100-240 VAC
Frequency	50-60 Hz
Outputs	2 independent dimming channels
Technology	Leading-edge TRIAC
LED load	2 × 100 W (230 VAC) · 2 × 60 W (120 VAC)
Wi-Fi	2.4 GHz
Dimensions	39.2 × 39.2 × 18 mm
Warranty	2 years

CONNECTED ECOSYSTEM



GEYER Smart

Control · Schedules · Automations

COMPATIBILITY



Amazon Alexa



Google Home



Tuya Smart



Smart Life

APP AVAILABLE ON



Lighting that adapts to every space.

Two independent lighting circuits with local ON/OFF, dimming and control from your phone.



LIVING ROOM

Set separate brightness levels for main and ambient lighting.



BEDROOM

Adjust two lighting zones independently for comfort and relaxation.



HOLIDAY HOME / AIRBNB

Create welcoming lighting scenes and control them remotely.



SHOP / HOSPITALITY

Adjust two lighting circuits for different activities and times of day.

FROM INSTALLATION TO SMART CONTROL

1

INSTALLATION

Behind the wall switch

2

WIRING

Two outputs - S1 / S2

3

PAIRING

GEYER Smart - 2.4 GHz

4

DIMMING

Locally and from your phone

IMPORTANT APPLICATION REQUIREMENTS

- Installation by a licensed electrician.
- Neutral conductor and 2.4 GHz Wi-Fi are required.
- Use only compatible dimmable LED lamps.
- Load must not exceed 100 W per channel at 230 VAC.



GEYER Smart

Two lighting zones in one view

ON/OFF, dimming, lighting scenes and sharing with up to 20 users.