

GEYER SMART SOLUTIONS

GS-SHUTTER

Smart Wi-Fi Shutter Control Module

0–100% position control after calibration

1.7 A | 18.5 mm | Wi-Fi 2.4 GHz

Local wall control and remote operation of roller shutters, blinds, awnings and curtains through GEYER Smart.



GENERAL SPECIFICATIONS

Description	Smart Wi-Fi shutter control module
Dimensions	39 x 39 x 18.5 mm
Mounting	Wall switch box · recommended depth 5–6 cm
Ingress protection	IP22
Connectivity	Wi-Fi IEEE 802.11 b/g/n, 2.4 GHz
Neutral conductor	Required
Operating temperature	-20 °C to +55 °C


ELECTRICAL SPECIFICATIONS

Input voltage	100–240 VAC
Frequency	50–60 Hz
Maximum motor current	1.7 A · inductive load
Motor outputs	L1 / L2 for both directions
Output interlock	L1 and L2 cannot be energised simultaneously
Compatible systems	Motorised shutters · blinds · awnings · curtains

APP FUNCTIONS & CAPABILITIES

Position control	0–100% after calibration
Local control	Rocker switch or momentary push-buttons via S1 and S2
Schedules	Weekly opening and closing schedule
Automations	Sunrise and sunset times
Sharing	Up to 20 users
Notifications	Push notifications

WIRING DIAGRAM

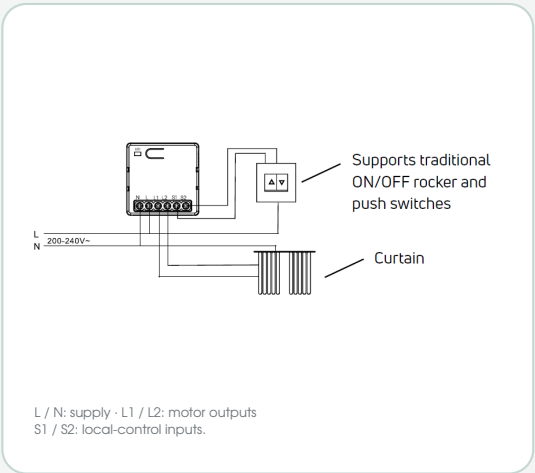

COMPLIANCE & COMMERCIAL DETAILS

Compliance	CE
European Directives	LVD 2014/35/EU · EMC 2014/30/EU · RED 2014/53/EU · RoHS 2011/65/EU + (EU) 2015/863
Warranty	2 years
EAN	5206277014015

Imported by: GEYER Hellas S.A.,
Mourikiou-Drosias Provincial Road, P.C. 34100,
Chalkida, Greece



Motor suitability, protection selection and wiring must be assessed by a licensed electrician, with the power supply isolated.