

1 GS-THWIR - Wi-Fi Thermostat & A/C Controller with Infrared Control

Key data and installation




WI-FI THERMOSTAT & A/C CONTROLLER WITH INFRARED CONTROL

Control compatible split air conditioners via infrared.

Power supply	5 V DC / 1 A
Included	USB-C cable - no power adapter
Setting range	0-40 °C
Network	Wi-Fi 2.4 GHz

INSTALLATION & INFRARED SETUP




- 1 Fix the base to the wall and connect the USB-C cable.
- 2 Place the device with a clear line of sight to the air conditioner.

IR CODE PAIRING



- 1 Install the IR Thermostat app and enable Bluetooth.
- 2 Press and hold M + ▲ for 3 s until the Bluetooth indicator flashes.
- 3 Select the brand, test at least 3 commands and download the correct code.

THERMOSTAT DISPLAY DESCRIPTION

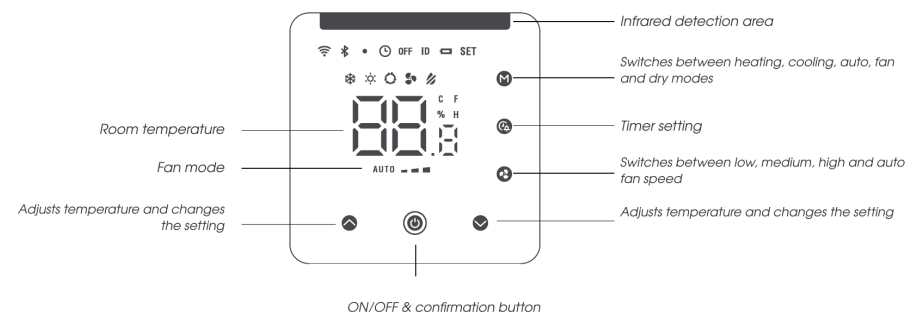

BEFORE PAIRING

- 2.4 GHz Wi-Fi network with Internet access.
- GEYER Smart and Bluetooth enabled on the phone.

INSTALLATION

The infrared transmitter must have line of sight to the indoor unit.

COMPATIBILITY

A compatible IR code is required for the brand and model.

2

Pairing and basic operation

GEYER Smart | Wi-Fi 2.4 GHz



GEYER Smart

Download the app and create an account or sign in to your existing account.



SCAN TO DOWNLOAD

Select "Sign Up" or sign in.

ADD & PAIR IN 5 STEPS

The phone must be connected to a 2.4 GHz Wi-Fi network with Internet access.

- Tap "+" or "Add Device".
- Press and hold and simultaneously for 3 s.
- Enter the 2.4 GHz Wi-Fi password.
- Wait and tap "Done".
- Set temperature and A/C mode.

BASIC FUNCTIONS



REMOTE CONTROL

Temperature and A/C modes.



FIVE OPERATING MODES

Cooling, heating, fan, auto, dry.



TEMPERATURE & HUMIDITY

Instant room-condition display.



TIMER

Operation timer from 0.5 to 24 hours.

IF PAIRING FAILS

Check 2.4 GHz Wi-Fi, Internet, Bluetooth and the network password.

Repeat the add-device procedure in the app.

Check the IR code and line of sight to the A/C.



MANUALS & DOCUMENTS

Scan for the full user manual and the rest of the product documents.