


GS-D2CH Operating Instructions

2CH Wi-Fi Dimmer Module



MANUAL OVERRIDE

The switch Dimmer terminal reserves the access of manual override function for the end-user to switch on/off or adjust the light level by push-switch.

- Short Push (<1s): permanent on/off function.
- Long Push (>1s): adjust the brightness level.

Notes:

- 1) Both the adjustment on App and push switch can overwrite each other, the last adjustment remains in memory.
- 2) App control is synchronized with the manual switch.
- 3) The "S" terminals may be left unconnected if no manual control is required.

Wiring Instructions and Diagrams


1. Turn off the power supply before carrying out any electrical installation work.
2. Connect wires according to the wiring diagram.
3. Insert the module into the junction box.
4. Turn on the power supply and follow switch module configuration instructions.

Notes: Take your smartphone close to the switch module when you're configuring, and make sure you have min. 50% Wi-Fi signal.


TECHNICAL SPECIFICATIONS

Product type	2CH Wi-Fi Dimmer Module
Voltage	AC100-240V 50/60Hz
Max. load	LED (AC230V 2x100W) (AC120V 2x60W)
Operation frequency	2.412GHz-2.484GHz
Operation temp.	-10°C + 40°C
Protocol	WiFi IEEE 802.11b/g/n
Operation range	<1 00m
Dims (WxDxH)	39.2x39.2x18mm
IP rating	IP20
Warranty	2years
Certificates	CE ROHS


with mounting clip

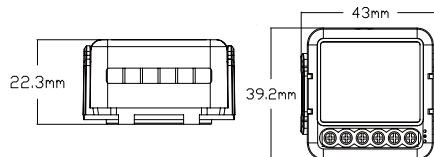


Single Control



Without Switch





Global international operation Whenever & Wherever You are, All-in-one Mobile App



Inhouse local operation



Aller Retour



INSTALLATION

▲ Warnings:

1. Installation must be carried out by a qualified electrician in accordance with local regulations.
2. Keep the device out of reach of children.
3. Keep the device away from water, damp or hot environment.
4. Install the device away from strong signal sources such as microwave oven that may cause signal interruption resulted to abnormal operation of the device.
5. Obstruction by concrete wall or metallic materials may reduce the effective operation range of the device and should be avoided.
6. Do NOT attempt to disassemble, repair or modify the device.

FAQ

Q1: What should I do if I can't configure the dimmer module?

- a. Please check whether device is powered on.
- b. Make sure your mobile and dimmer module are the same 2.4 Ghz WIFI network.
- c. Whether it's in good internet conditions.
- d. Make sure the password entered in App is correct.
- e. Make sure the wiring is correct.

Q2: What device can be connected to the Wi-Fi dimmer module?

Support triac dimming LED or tungsten lamp

Q3: What happens if the WIFI goes off?

You can still control the light connected the dimmer module with your traditional switch and once WIFI is active again the device connected to module will connect automatically to your WIFI network.

Q4: What should I do if I change the WIFI network or change the password?

You have to re-connect our Wi-Fi dimmer module to the new Wi-Fi network accordingly as per the App User Manual.

Q5: How do I reset the device?

Press traditional dimmer off (the one connected to the wi-fi dimmer module). Then press and hold for 10 seconds or more until lamp connected to the module will flick quickly and enter into configuration mode.

GEYER

GS-D2CH Operating Instructions

APP USER MANUAL



1


IOS APP /Android APP

Scan the QR code to download Geyer Smart APP, or you can also search keyword "GEYER Smart" at App Store or Googleplay to download App.




2

Log in or register your account with your mobile number or e-mail address. Type in the verification code sent to your mobile or mail box, then set your login password. Click "Connect" to enter into the APP.




3

After the wiring of switch module is done, press the reset key for about 10 seconds or Press traditional dimmer off (Either one connected to the wi-dimmer module). Then press and hold for 10 seconds until light connected to the module will quickly and enter into configuration mode or until the indicator light inside the module is flashing quickly for pairing.




4

1, Support multi-protocol matching: WIFI/Bluetooth.
2, Turn on Bluetooth, Click "+", follow the on-screen instruction for pairing.




5

The connecting will take about 10-120 seconds to complete depending on your network condition.




6

Finally, you can control the device via your mobile phone.



7

Connect to Amazon Alexa or Google Assistant for voice control, or share the devices with your families or friends.



8

Enjoy your smart life of home automation for lighting control by using our All-in-one mobile app wherever you are in the world or simply by voice control when you are sitting at home comfortably.