

GEYER SMART SOLUTIONS


GS-WKS3454

4-Button Wireless Kinetic Switch

No cable · no battery

RF 433 MHz | 4 buttons | 2 control groups

Self-powered wall switch for pairing with a compatible GEYER control module.

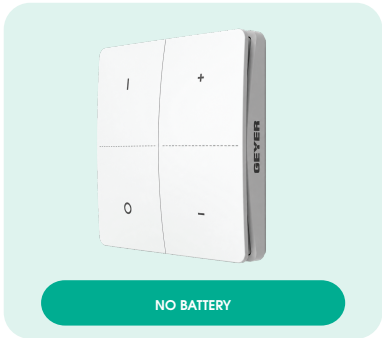

GENERAL SPECIFICATIONS

Description	Wireless kinetic push-button switch
Number of buttons	4
Control groups	2 independent groups (left / right), each with an upper and a lower button
Power supply	Self-powered · no battery
Wireless frequency	RF 433 MHz
Control range	Up to 80 m in open field · 25 m indoors
Operating temperature	-20 °C to +55 °C


FUNCTIONS & OPERATION

Operating method	Pairing with a compatible control module
Standard pairing	One button · ON/OFF · dimming where supported
Directional pairing	Upper ON / Dim+ · lower OFF / Dim-
One-to-many control	One switch can control multiple modules
Compatible module	GS-LSC-5IN1 and other compatible GEYER modules

INSTALLATION & MECHANICAL DATA

Installation	Double-sided tape · screws · type 86 wall box
Dimensions	86 × 86 × 17 mm
Ingress protection	IP20
Colour	White
Electrical connection	Not required · no load terminals

PRODUCT DIMENSIONS

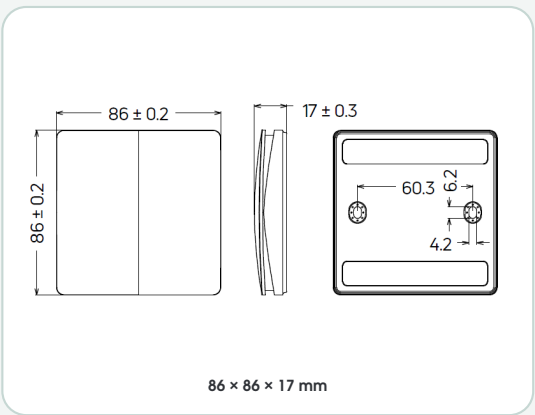

COMPLIANCE & COMMERCIAL DATA

Compliance	CE
European Directives	RED 2014/53/EU · RoHS 2011/65/EU + (EU) 2015/863
Warranty	2 years
EAN	5206277015319

Imported by: GEYER Hellas S.A.,
Mourikiou-Drosias Provincial Road,
P.C. 34100, Chalkida, Greece



The GS-WKS3454 does not switch an electrical load directly and must not be connected to mains voltage.