

1

GS-WT03 - Smart Wi-Fi Irrigation Controller

Installation and key information



REMOTE WATERING & SCHEDULES WEEKLY AND CYCLIC IRRIGATION


Phone control, Weather Delay and history
through the GEYER Smart app.

Power supply	4 x AA
Pressure	100-800 kPa
Protection	IP55
Network	Wi-Fi 2.4 GHz

INSTALLATION STEPS

- 1 Pull out the compartment and insert 4 matching AA batteries with correct polarity.
- 2 Check that the battery compartment is fully and correctly closed.
- 3 Screw the filtered DN20 inlet onto a compatible outdoor tap.
- 4 Connect the watering line to the hose connector adapter.
- 5 Open the water supply and carefully check all connections for leaks.

PRODUCT PARTS & CONNECTIONS

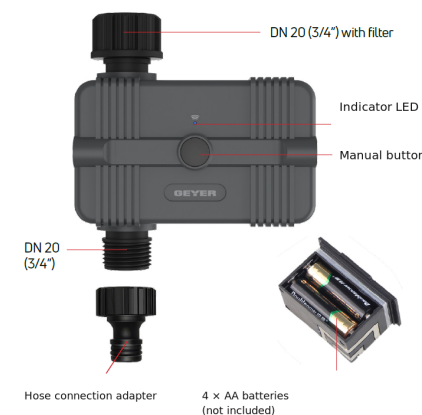

BEFORE PAIRING

- 2.4 GHz Wi-Fi with Internet · Bluetooth enabled.
- Keep the phone close to the controller.

FROST PROTECTION



Remove the device from the tap
and store it indoors.

IP55 PROTECTION



Do not immerse. Close
the battery compartment correctly.

2

Pairing and basic use

GEYER Smart | Wi-Fi 2.4 GHz



GEYER Smart

Download the app and create an account or sign in to your existing account.



SCAN TO DOWNLOAD

Select "Sign Up" or sign in.

ADD & PAIR IN 5 STEPS

The phone must be connected to 2.4 GHz Wi-Fi with Internet access.

1

Tap "+" or "Add Device".

2

Hold the button for 5 s until the blue LED flashes rapidly.

3

Tap "Add" and enter the Wi-Fi network and password.

4

Wait and tap "Done".

5

Check watering, schedules and history.

BASIC FUNCTIONS



ON / OFF

Remote and local control.



SCHEDULES

Weekly and cyclic irrigation.



WEATHER DELAY

Manual delay for 24 / 48 / 72 hours.



HISTORY

Watering start and end time.

IF PAIRING FAILS

Check 2.4 GHz Wi-Fi, Internet, Bluetooth and the network password.

Move the phone and controller closer to the router.

Hold the button again for 5 s until the blue LED flashes rapidly.



MANUALS & DOCUMENTS

Scan for the detailed manual and all other product documents.