

1

GS-WKS3454 - 4-Button Wireless Kinetic Switch

Key information and installation



WIRELESS RF 433 MHz CONTROL WITHOUT A BATTERY 4 BUTTONS · 2 INDEPENDENT GROUPS

Pair with a compatible GEYER module for ON/OFF, dimming and other available functions.

Power supply	Self-powered
Dimensions	86 × 86 × 17 mm
Control range	80 m open field · 25 m indoors
Frequency	RF 433 MHz

INSTALLATION METHODS

1

DOUBLE-SIDED TAPE

Clean the smooth surface, apply the tape to the rear and press firmly.

2

SCREW MOUNTING


Carefully open the switch, secure the base and press the body back into place.

3


TYPE 86 WALL BOX

Secure the base to a type 86 wall box using a suitable mounting plate.

DIMENSIONS

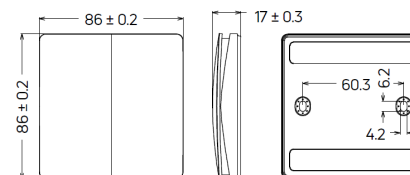**86 × 86 × 17 mm**

BUTTON FUNCTIONS



Upper: ON / Dim+
Lower: OFF / Dim-
Two groups: left / right

BEFORE PAIRING

Confirm that the module supports RF 433 MHz.

Check the pairing instructions for the specific module.

SAFE USE

Do not connect to mains voltage or directly to an electrical load.

ACTUAL RANGE

Walls, metal and the environment can reduce the operating range.

2

Pairing and basic use

RF 433 MHz | no battery

STANDARD PAIRING

- 1 Press and hold the module pairing button for about 3 s.
- 2 Release the button when the indicator starts flashing.
- 3 Press the selected GS-WKS3454 button once. The indicator goes out when pairing is complete.

With a compatible dimming module, press and hold to adjust brightness.

DIRECTIONAL PAIRING

- 1 Hold the module pairing button for about 3 s to enter pairing mode.
- 2 Press the selected button four times within 1 s.
- 3 After pairing: upper button ON / Dim+ and lower button OFF / Dim-.


Repeat the procedure separately for the left and right groups.

KEY FUNCTIONS



NO BATTERY

Energy from every press.



2 GROUPS

Left and right button pairs.



ON / OFF

Directional control.



DIMMING

Press and hold where supported.

IF PAIRING FAILS

Move the switch closer to the module and try again.

Make sure the module is in pairing mode.

For standard pairing, press the button only once.

To clear pairing, follow the module instructions.



MANUALS & DOCUMENTS

Scan for the detailed manual and the product's other documents.