


GEYER SMART SOLUTIONS

Roller Shutter Control Kit Wi-Fi & RF

KIT-SHUTTER · 1.7 A · RF 433 MHz

Smart shading with a self-powered wireless switch, without new wiring or batteries.

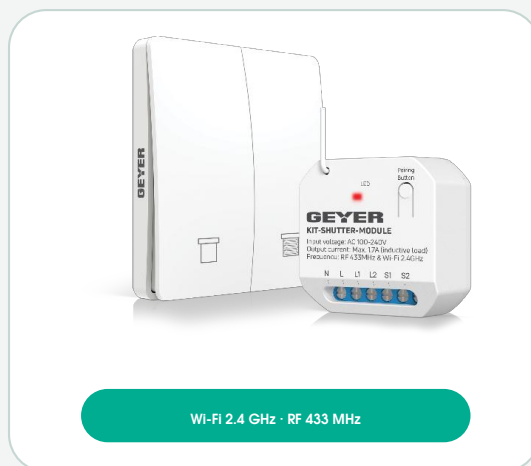

Wi-Fi 2.4 GHz · RF 433 MHz

**WIRELESS KINETIC SWITCH**

Local control without new wiring at the switch.

**POSITION CALIBRATION**

Accurate position display and selection from 0% to 100%.

**NO BATTERY**

Self-powered operation using the kinetic energy of each press.

**SCHEDULES & AUTOMATIONS**

Weekly scheduling and sunrise/sunset operation.

KEY TECHNICAL DATA

Module supply	100-240 VAC · 50-60 Hz
Maximum current	1.7 A · inductive load
Switch supply	Self-powered
Connectivity	Wi-Fi 2.4 GHz · RF 433 MHz
RF range	80 m open field · 25 m indoors
Module dimensions	44 × 44 × 22 mm
Switch dimensions	86 × 86 × 17 mm
Protection	Module IP20 · switch IP20
Warranty	2 years

CONNECTED ECOSYSTEM**GEYER Smart**

Control · Schedules · Automations

COMPATIBILITY

Amazon Alexa



Google Home



Tuya Smart



Smart Life

APP AVAILABLE ON

Smart shading without new wiring.

Place the wireless control point wherever it is convenient, without wall chasing, switch wiring or battery changes.



LIVING ROOM

Add a control point for natural light, privacy and comfort.



TERRACE / BALCONY

Control an electric awning remotely and create schedules.



BEDROOM

Schedule blinds or shutters to open and close automatically.



SHOP / HOSPITALITY

Automate shading according to business hours and sunrise/sunset.

FROM INSTALLATION TO SMART CONTROL

1

INSTALLATION

Module in the wall box

2

RF PAIRING

Wireless switch

3

APP

Wi-Fi 2.4 GHz

4

CONTROL

Locally and from your phone

IMPORTANT APPLICATION REQUIREMENTS

- The module must be installed by a licensed electrician.
- The wireless switch requires no wiring or battery.
- A neutral conductor and 2.4 GHz Wi-Fi are required.
- The motor must be compatible and rated up to 1.7 A.



GEYER Smart

Shading control on one screen

Open, pause, close and position plus sunrise/sunset automations.