

SMART ROLLER SHUTTER MODULE · WIFI

Open and close your shutters from your phone


Compact module for the switch box that controls roller shutters, blinds, awnings and any motor-operated shading device through the GEYER Smart app (WiFi 2.4 GHz). Voice control with Google Assistant and Amazon Alexa is also supported.

- Shutters, blinds, awnings
- Up to 374 W / 1.7 A
- Switch or push button



Warning: Installation must be carried out by a qualified electrician. Switch off the power supply before wiring and follow the diagram.


1 Get to know the module

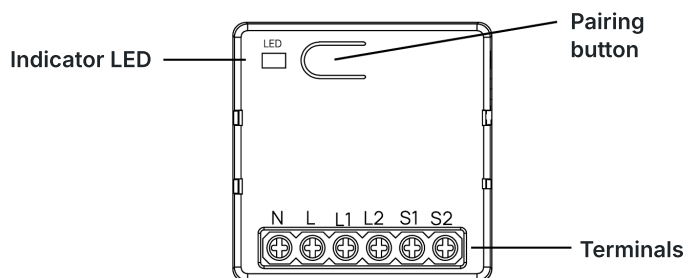

- N** Input neutral
- L** Input live
- S1** Switch input: forward motion (shutter opens)
- S2** Switch input: reverse motion (shutter closes)
- L1** Motor output: forward motion
- L2** Motor output: reverse motion

2 Wiring

- 1 Connect live and neutral from the mains to the module (L, N).
- 2 Connect outputs L1/L2 to the motor using cable rated for 100–240 V, depending on the voltage on site.

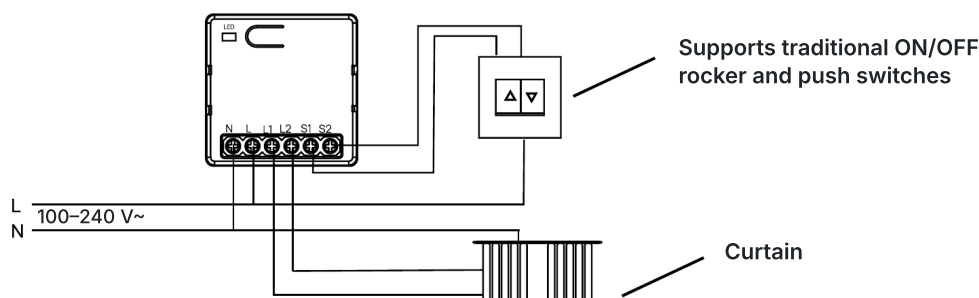

Automatic switch detection: Once the module is powered, press the wall switch once. The module detects whether it is a rocker or a push switch. To detect it again, switch the power off and back on.

3 Connect to the app




- a Scan the QR code or search for **GEYER Smart** on Google Play or the App Store.
- b Follow the app's prompts to create an account and log in.

1 The first time it is powered, the module enters pairing mode automatically and the LED flashes fast. If not, press and hold the **pairing button** for ~10 seconds.

2 On the app's home screen tap "+" in the top-right corner, then **"Add Device"**. Tap **"Add"** in the green frame next to the module.

3 Enter your WiFi name and password and tap **"Next"** to add the device.



Once added, the device appears on the app's home page. From there you control the shutter, run the calibration and change other settings.

4 Control with Amazon Alexa & Google Home

Give your devices names in the app that Alexa or Google Home can easily understand.

What you need

- Amazon Alexa or Google Home app
- Amazon Alexa or Google Home account
- Echo, Echo Dot, Tap or another Amazon voice device
- Google Home, Google Home Mini or another Google voice device

Enable it


- 1** In Alexa: search for the **"Smart Life"** skill and add it to "Smart Home". In Google Home: search for the **"Smart Life"** action and add it to Home Control.
- 2** Enable it and enter the email and password of your GEYER Smart account.
- 3** You can now control the shutter by voice, e.g.:

"Alexa / OK Google, open / close living room curtain"

5 Specifications

Model	GS-SHUTTER
Power supply	100-240 VAC, 50/60 Hz
Max. current	1.7 A
Max. load	374 W
Frequency	WiFi 2.4 GHz
Range	80 m outdoor · 25 m indoor
Operating temperature	-20 ... +55 °C
Dimensions (L × W × H)	39 × 39 × 18.5 mm
IP rating	IP22
Control	GEYER Smart app


6 Dimensions

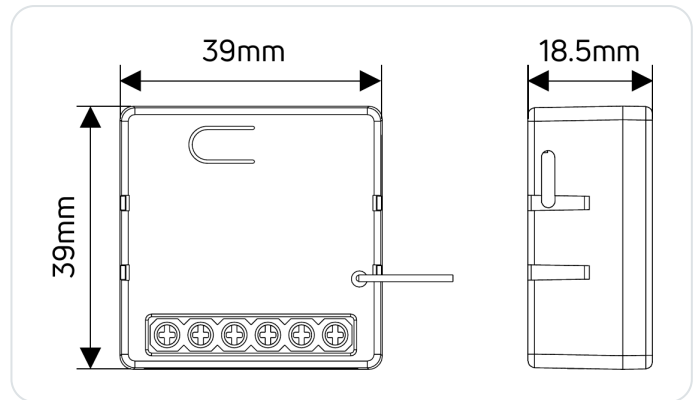

- 39 × 39 mm
- Height: 18.5 mm

All dimensions in mm.

7 Installation location

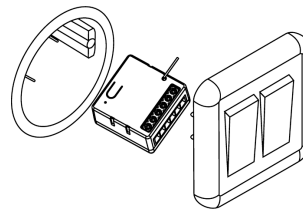

Inside the switch box.
Recommended box
depth 5 or 6 cm.

8 Reset the device

From the app

Open the device in the app, tap the button in the top-right corner, select "Remove Device", then "Remove and Clear Data".

With the pairing button

Press and hold the pairing button for ~10 seconds. When you release it, the LED flashes fast and the module has been removed from the app.



Geyer Hellas S.A.

Drosia Chalkis, Evia, GR 34100
Tel: +30 22210 98711

cs@geyer.gr
www.geyer.gr

