

1

GS-122LH - Smart Wi-Fi Smoke Alarm

Key information and installation

**PHOTOELECTRIC SMOKE DETECTION
LOCAL ALARM & NOTIFICATIONS**

Powerful ≥ 85 dB / 3 m alarm and notifications
through the GEYER Smart app.


Power supply	3 × LR6 AA
Battery life	Up to 3 years
Dimensions	Ø85 × 47 mm
Network	Wi-Fi 2.4 GHz

INSTALLATION STEPS

- 1 Choose a suitable ceiling position as specified in the manual.
- 2 Secure the base using the supplied screws and wall plugs.
- 3 Insert 3 LR6 AA alkaline batteries with the correct polarity.
- 4 Align the device with the base and turn it clockwise until it locks.
- 5 Hold TEST for approx. 3 s and confirm the LED and audible alarm.

CONTROLS & DIMENSIONS**TEST / HUSH · LED**

Ø85 × 47 mm

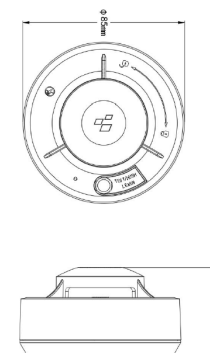CORRECT POSITIONING

Install on the ceiling in a suitable position.
Follow the distances specified in the manual.

BEFORE PAIRING

- 2.4 GHz Wi-Fi network with Internet access.
- GEYER Smart · Bluetooth and location enabled.

IMPORTANT SAFETY

Do not paint, cover or disassemble
the device. Test it weekly.

AVOID

Bathrooms, cooking steam, strong airflow,
dust and fluorescent lighting.

2

Pairing and basic use

GEYER Smart | Wi-Fi 2.4 GHz



GEYER Smart

Download the app and create an account or sign in.



SCAN TO DOWNLOAD

Select "Sign up" or sign in.

ADD & PAIR IN 5 STEPS

The phone must be connected to 2.4 GHz Wi-Fi with Internet access.

1

Tap "+" or "Add Device".

2

Press TEST twice. The green LED flashes rapidly.

3

Enter the 2.4 GHz Wi-Fi password.


4

Wait, then tap "Done".

5

Check status, history and battery level.

BASIC FUNCTIONS



ALARM

Local sound and mobile notification.



TEST / HUSH

3 s test and temporary silence.



HISTORY

Alarm and operating events.



DEVICE SHARING

Access for up to 20 users.

IF PAIRING FAILS

Check 2.4 GHz Wi-Fi, Internet, Bluetooth, location and network password.

Move the alarm close to the router for initial connection.

Press TEST twice again and complete pairing within 2 minutes.



MANUALS & DOCUMENTS

Scan for the detailed manual and the other product documents.